


Series VV (100-10kV)

10W Isolated/Non-isolated Proportional High Voltage DC-DC Converter

PICO
Electronics, Inc.

PRODUCT OVERVIEW

The VV series are unregulated DC-DC converters in a low 0.500" profile package footprint with up to 10,000V single output models. They can operate over the temperature range of -25°C to +70°C without derating, a heat sink or active cooling.

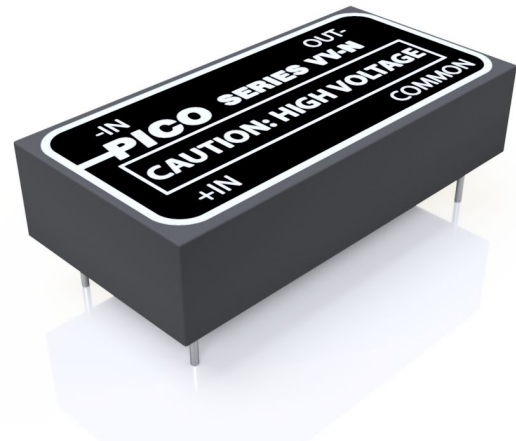

FEATURES

- Up to 10W output power
- Output voltage is proportional to input voltage
- Up to 10,000V output models
- Wide input voltage range
- Through hole mounting
- Transformer Isolated modules
- No heat sink or derating required

Contact Pico for part number of available options:

- Expanded operating temp: -55°C to +85°C
- Select screening per MIL-STD-883:
 - Stabilization Bake
 - Temperature Cycle
 - Burn-In
- Special Input Voltage, Output Voltage, Isolation Voltage or Output Power

28	VV	10	-P
INPUT VOLTAGE RANGE	SERIES NAME	MAX. OUTPUT VOLTAGE	OUTPUT ISOLATION (≥6000V OUTPUT VOLT.)
5 = 2/3.5 - 5V 9 = 3.5/4 - 9V 12 = 4 - 12V 15 = 5 - 15V 24 = 6 - 24V 28 = 7 - 28V 48 = 14 - 48V	VV	0.1 = 100V 0.2 = 200V 0.3 = 300V 0.4 = 400V 0.5 = 500V 0.6 = 600V 0.7 = 700V 0.8 = 800V 0.9 = 900V 1 = 1000V 2 = 2000V 3 = 3000V 4 = 4000V 5 = 5000V 6 = 6000V 7 = 7000V 8 = 8000V 9 = 9000V 10 = 10,000V	BLANK = ISOLATED -P = NON-ISOLATED POSITIVE OUTPUT -N = NON-ISOLATED NEGATIVE OUTPUT

MODEL LIST - ISOLATED OUTPUT

Pico Part Number	Input Voltage		Output Voltage		Output Current		Output Power [W]	Efficiency ⁽¹⁾ [%] typ.	Output Ripple ⁽³⁾ [%]
	Min. [VDC]	Max. [VDC]	Min. V _{IN} [VDC]	Max. V _{IN} [VDC]	Min. ⁽²⁾ [mA]	Max. ^(3,4) [mA]			
5VV0.1	3.5	5	47	100	3	60	6	74	5
5VV0.2			55	200	1.5	30	6	74	3
5VV0.3			60	300	1	20	6	74	
5VV0.4			65	400	0.75	15	6	74	
5VV0.5			70	500	0.6	12	6	74	
5VV0.6			75	600	0.5	10	6	74	
5VV0.7			78	700	0.43	8.6	6	74	
5VV0.8			80	800	0.38	7.5	6	74	
5VV0.9			85	900	0.33	6.7	6	74	
5VV1	2	5	100	1000	0.3	6	6	76	2
5VV2			250	2000	0.15	3	6	76	
5VV3			300	3000	0.1	2	6	76	
5VV4			550	4000	0.069	1.375	5.5	78	
5VV5			850	5000	0.055	1.1	5.5	78	
5VV6			625	6000	0.042	0.833	5	79	
5VV7			1100	7000	0.036	0.714	5	77	
5VV8			1750	8000	0.031	0.625	5	76	
5VV9			1400	9000	0.028	0.556	5	75	
5VV10			2150	10,000	0.025	0.5	5	75	
9VV0.1	3.5	5	30	100	3.5	70	7	74	5
9VV0.2			60	200	1.75	35	7	74	3
9VV0.3			90	300	1.17	23.3	7	74	
9VV0.4			120	400	0.88	17.5	7	74	
9VV0.5			150	500	0.7	14	7	74	
9VV0.6			205	600	0.58	11.7	7	74	
9VV0.7			240	700	0.5	10	7	74	
9VV0.8			274	800	0.44	8.8	7	74	
9VV0.9			308	900	0.39	7.8	7	74	
9VV1	2	5	75	1000	0.35	7	7	82	2
9VV2			200	2000	0.175	3.5	7	82	
9VV3			400	3000	0.117	2.333	7	78	
9VV4			625	4000	0.088	1.75	7	82	
9VV5			1075	5000	0.06	1.2	6	82	
9VV6			2000	6000	0.05	1	6	82	
9VV7			2250	7000	0.043	0.857	6	80	
9VV8			2500	8000	0.038	0.75	6	79	
9VV9			2900	9000	0.033	0.667	6	77	
9VV10			3100	10,000	0.03	0.6	6	76	

MODEL LIST - ISOLATED OUTPUT

Pico Part Number	Input Voltage		Output Voltage		Output Current		Output Power [W]	Efficiency ⁽¹⁾ [%] typ.	Output Ripple ⁽³⁾ [%]
	Min. [VDC]	Max. [VDC]	Min. V _{IN} [VDC]	Max. V _{IN} [VDC]	Min. ⁽²⁾ [mA]	Max. ^(3,4) [mA]			
12VV0.1	4	12	30	100	4	80	8	82	5
12VV0.2			60	200	2	40	8	82	3
12VV0.3			90	300	1.33	26.7	8	82	
12VV0.4			120	400	1	20	8	82	
12VV0.5			150	500	0.8	16	8	84	
12VV0.6			176	600	0.67	13.3	8	84	
12VV0.7			205	700	0.57	11.4	8	84	
12VV0.8			235	800	0.5	10	8	84	
12VV0.9			264	900	0.44	8.9	8	84	
12VV1			100	1000	0.4	8	8	82	2
12VV2			175	2000	0.2	4	8	82	
12VV3			350	3000	0.133	2.667	8	82	
12VV4			525	4000	0.088	1.75	7	83	
12VV5			1050	5000	0.06	1.2	6	83	
12VV6			1700	6000	0.05	1	6	83	
12VV7			1900	7000	0.043	0.857	6	81	
12VV8			2100	8000	0.038	0.75	6	79	
12VV9			2200	9000	0.033	0.667	6	77	
12VV10			2100	10,000	0.03	0.6	6	76	
15VV0.1	5	15	30	100	4.25	85	8.5	82	5
15VV0.2			60	200	2.13	42.5	8.5	82	3
15VV0.3			90	300	1.42	28.3	8.5	82	
15VV0.4			120	400	1.06	21.3	8.5	83	
15VV0.5			150	500	0.85	17	8.5	83	
15VV0.6			176	600	0.71	14.2	8.5	83	
15VV0.7			205	700	0.61	12.1	8.5	83	
15VV0.8			235	800	0.53	10.6	8.5	83	
15VV0.9			264	900	0.47	9.4	8.5	83	
15VV1			75	1000	0.425	8.5	8.5	83	2
15VV2			200	2000	0.213	4.25	8.5	83	
15VV3			400	3000	0.133	2.667	8	83	
15VV4			600	4000	0.088	1.75	7	81	
15VV5			1050	5000	0.06	1.2	6	81	
15VV6			1700	6000	0.05	1	6	80	
15VV7			1900	7000	0.043	0.857	6	80	
15VV8			2150	8000	0.038	0.75	6	79	
15VV9			2300	9000	0.033	0.667	6	77	
15VV10			2200	10,000	0.03	0.6	6	76	

MODEL LIST - ISOLATED OUTPUT

Pico Part Number	Input Voltage		Output Voltage		Output Current		Output Power [W]	Efficiency ⁽¹⁾ [%] typ.	Output Ripple ⁽³⁾ [%]
	Min. [VDC]	Max. [VDC]	Min. V _{IN} [VDC]	Max. V _{IN} [VDC]	Min. ⁽²⁾ [mA]	Max. ^(3,4) [mA]			
24VV0.1	7	24	23	100	4.5	90	9	83	5
24VV0.2			48	200	2.25	45	9	83	3
24VV0.3			70	300	1.5	30	9	83	
24VV0.4			95	400	1.13	22.5	9	83	
24VV0.5			100	500	0.9	18	9	83	
24VV0.6			132	600	0.75	15	9	83	
24VV0.7			154	700	0.64	12.9	9	83	
24VV0.8			176	800	0.56	11.3	9	83	
24VV0.9			198	900	0.5	10	9	83	
24VV1			75	1000	0.45	9	9	84	2
24VV2			175	2000	0.225	4.5	9	84	
24VV3			200	3000	0.15	3	9	82	
24VV4			400	4000	0.1	2	8	82	
24VV5			1075	5000	0.06	1.2	6	82	
24VV6			1400	6000	0.05	1	6	81	
24VV7			1600	7000	0.043	0.857	6	81	
24VV8			1750	8000	0.038	0.75	6	80	
24VV9			1800	9000	0.033	0.667	6	78	
24VV10			1500	10,000	0.03	0.6	6	77	
28VV0.1	8	28	23	100	5	100	10	83	5
28VV0.2			48	200	2.5	50	10	83	3
28VV0.3			70	300	1.67	33.3	10	83	
28VV0.4			95	400	1.25	25	10	83	
28VV0.5			120	500	1	20	10	83	
28VV0.6			132	600	0.83	16.7	10	83	
28VV0.7			154	700	0.71	14.3	10	83	
28VV0.8			176	800	0.63	12.5	10	83	
28VV0.9			198	900	0.56	11.1	10	83	
28VV1			75	1000	0.5	10	10	83	2
28VV2			175	2000	0.25	5	10	83	
28VV3			250	3000	0.167	3.333	10	83	
28VV4			375	4000	0.1	2	8	82	
28VV5			1100	5000	0.06	1.2	6	82	
28VV6			1350	6000	0.05	1	6	82	
28VV7			1500	7000	0.043	0.857	6	80	
28VV8			1600	8000	0.038	0.75	6	79	
28VV9			1800	9000	0.033	0.667	6	78	
28VV10			2200	10,000	0.03	0.6	6	77	

MODEL LIST - ISOLATED OUTPUT

Pico Part Number	Input Voltage		Output Voltage		Output Current		Output Power [W]	Efficiency ⁽¹⁾ [%] typ.	Output Ripple ⁽³⁾ [%]
	Min. [VDC]	Max. [VDC]	Min. V _{IN} [VDC]	Max. V _{IN} [VDC]	Min. ⁽²⁾ [mA]	Max. ^(3,4) [mA]			
48VV0.1	15	48	27	100	4	80	8	81	5
48VV0.2			50	200	2	40	8	81	3
48VV0.3			73	300	1.33	26.7	8	81	
48VV0.4			98	400	1	20	8	81	
48VV0.5			140	500	0.8	16	8	84	
48VV0.6			154	600	0.67	13.3	8	84	
48VV0.7			180	700	0.57	11.4	8	84	
48VV0.8			205	800	0.5	10	8	84	
48VV0.9			208	900	0.44	8.9	8	84	
48VV1			75	1000	0.4	8	8	80	2
48VV2	15	48	200	2000	0.2	4	8	80	
48VV3			450	3000	0.133	2.667	8	80	
48VV4			400	4000	0.1	2	8	80	
48VV5			1075	5000	0.06	1.2	6	80	
48VV6			1600	6000	0.05	1	6	80	
48VV7			1700	7000	0.043	0.857	6	79	
48VV8			1850	8000	0.038	0.75	6	79	
48VV9			2000	9000	0.033	0.667	6	78	
48VV10			2200	10,000	0.03	0.6	6	77	

Note 1: Tested at maximum input voltage and full output load.

Note 2: Maintain minimum 5% of rated load to prevent a voltage surge.

Note 3: For ≤900V output models, a 0.1μF, 2kV high quality ceramic capacitor is required across the output.

Note 4: Unit is capable of sourcing max output current over the entire output voltage range.

Note 5: For isolated models, input ground and output ground is not connected internally. Input ground and output ground can not be connected anywhere in the circuit.

MODEL LIST - NON-ISOLATED POSITIVE OUTPUT

Pico Part Number	Input Voltage		Output Voltage		Output Current		Output Power [W]	Efficiency ⁽¹⁾ [%] typ.	Output Ripple ⁽³⁾ [%]
	Min. [VDC]	Max. [VDC]	Min. V _{IN} [VDC]	Max. V _{IN} [VDC]	Min. ⁽²⁾ [mA]	Max. ^(3,4) [mA]			
5VV6-P	2	5	+625	+6000	0.042	0.833	5	79	2
5VV7-P			+1100	+7000	0.036	0.714		77	
5VV8-P			+1750	+8000	0.031	0.625		76	
5VV9-P			+1400	+9000	0.028	0.556		75	
5VV10-P			+2150	+10000	0.025	0.5		75	
9VV6-P	3.5	9	+2000	+6000	0.05	1	6	82	2
9VV7-P			+2250	+7000	0.043	0.857		80	
9VV8-P			+2500	+8000	0.038	0.75		79	
9VV9-P			+2900	+9000	0.033	0.667		77	
9VV10-P			+3100	+10000	0.03	0.6		76	
12VV6-P	4	12	+1700	+6000	0.05	1	6	83	2
12VV7-P			+1900	+7000	0.043	0.857		81	
12VV8-P			+2100	+8000	0.038	0.75		79	
12VV9-P			+2200	+9000	0.033	0.667		77	
12VV10-P			+2100	+10000	0.03	0.6		76	
15VV6-P	5	15	+1700	+6000	0.05	1	6	80	2
15VV7-P			+1900	+7000	0.043	0.857		80	
15VV8-P			+2150	+8000	0.038	0.75		79	
15VV9-P			+2300	+9000	0.033	0.667		77	
15VV10-P			+2200	+10000	0.03	0.6		76	
24VV6-P	7	24	+1400	+6000	0.05	1	6	81	2
24VV7-P			+1600	+7000	0.043	0.857		81	
24VV8-P			+1750	+8000	0.038	0.75		80	
24VV9-P			+1800	+9000	0.033	0.667		78	
24VV10-P			+1500	+10000	0.03	0.6		77	
28VV6-P	8	28	+1350	+6000	0.05	1	6	82	2
28VV7-P			+1500	+7000	0.043	0.857		80	
28VV8-P			+1600	+8000	0.038	0.75		79	
28VV9-P			+1800	+9000	0.033	0.667		78	
28VV10-P			+2200	+10000	0.03	0.6		77	
48VV6-P	15	48	+1600	+6000	0.05	1	6	80	2
48VV7-P			+1700	+7000	0.043	0.857		79	
48VV8-P			+1850	+8000	0.038	0.75		79	
48VV9-P			+2000	+9000	0.033	0.667		78	
48VV10-P			+2200	+10000	0.03	0.6		77	

Note 1: Tested at maximum input voltage and full output load.

Note 2: Maintain minimum 5% of rated load to prevent a voltage surge.

Note 4: Unit is capable of sourcing max output current over the entire output voltage range.

Note 6: For non-isolated positive models, output COM terminal must be connected to input positive or input negative externally. Output will be positive voltage and non-isolated from input. Module is internally transformer isolated.

MODEL LIST - NON-ISOLATED NEGATIVE OUTPUT

Pico Part Number	Input Voltage		Output Voltage		Output Current		Output Power [W]	Efficiency ⁽¹⁾ [%] typ.	Output Ripple ⁽³⁾ [%]
	Min. [VDC]	Max. [VDC]	Min. V _{IN} [VDC]	Max. V _{IN} [VDC]	Min. ⁽²⁾ [mA]	Max. ^(3,4) [mA]			
5VV6-N	2	5	-625	-6000	0.042	0.833	5	79	2
5VV7-N			-1100	-7000	0.036	0.714		77	
5VV8-N			-1750	-8000	0.031	0.625		76	
5VV9-N			-1400	-9000	0.028	0.556		75	
5VV10-N			-2150	-10,000	0.025	0.5		75	
9VV6-N	3.5	9	-2000	-6000	0.05	1	6	82	2
9VV7-N			-2250	-7000	0.043	0.857		80	
9VV8-N			-2500	-8000	0.038	0.75		79	
9VV9-N			-2900	-9000	0.033	0.667		77	
9VV10-N			-3100	-10,000	0.03	0.6		76	
12VV6-N	4	12	-1700	-6000	0.05	1	6	83	2
12VV7-N			-1900	-7000	0.043	0.857		81	
12VV8-N			-2100	-8000	0.038	0.75		79	
12VV9-N			-2200	-9000	0.033	0.667		77	
12VV10-N			-2100	-10,000	0.03	0.6		76	
15VV6-N	5	15	-1700	-6000	0.05	1	6	80	2
15VV7-N			-1900	-7000	0.043	0.857		80	
15VV8-N			-2150	-8000	0.038	0.75		79	
15VV9-N			-2300	-9000	0.033	0.667		77	
15VV10-N			-2200	-10,000	0.03	0.6		76	
24VV6-N	7	24	-1400	-6000	0.05	1	6	81	2
24VV7-N			-1600	-7000	0.043	0.857		81	
24VV8-N			-1750	-8000	0.038	0.75		80	
24VV9-N			-1800	-9000	0.033	0.667		78	
24VV10-N			-1500	-10,000	0.03	0.6		77	
28VV6-N	8	28	-1350	-6000	0.05	1	6	82	2
28VV7-N			-1500	-7000	0.043	0.857		80	
28VV8-N			-1600	-8000	0.038	0.75		79	
28VV9-N			-1800	-9000	0.033	0.667		78	
28VV10-N			-2200	-10,000	0.03	0.6		77	
48VV6-N	15	48	-1600	-6000	0.05	1	6	80	2
48VV7-N			-1700	-7000	0.043	0.857		79	
48VV8-N			-1850	-8000	0.038	0.75		79	
48VV9-N			-2000	-9000	0.033	0.667		78	
48VV10-N			-2200	-10,000	0.03	0.6		77	

Note 1: Tested at maximum input voltage and full output load.

Note 2: Maintain minimum 5% of rated load to prevent a voltage surge.

Note 4: Unit is capable of sourcing max output current over the entire output voltage range.

Note 7: For non-isolated negative models, output COM terminal must be connected to input positive or input negative externally. Output will be negative voltage and non-isolated from input. Module is internally transformer isolated.

SPECIFICATIONS (Max. V_{IN} , Full Load, $T_A = +25^{\circ}\text{C}$, 1 hour warm up unless otherwise specified)**INPUT**

Parameter	Condition		Min.	Typ.	Max.	Units
Input Voltage Range	5VV input models	≤900V Output models	3.5	5	5	VDC
		≥1kV output models	2			
	9VV input models	≤900V Output models	4	9	9	
		≥1kV output models	3.5			
	12VV input models		4	12	12	
	15VV input models		5	15	15	
	24VV input models		7	24	24	
	28VV input models		8	28	28	
	48VV input models		15	48	48	

OUTPUT

Parameter	Condition	Min.	Typ.	Max.	Units
Line Regulation	Output voltage is proportional to input voltage				
Output Voltage Tolerance	Nominal V_{IN} , Full Load	5VV models	-	5	$\pm\%$
		All other models	-	3	$\pm\%$

ENVIRONMENTAL

Parameter	Condition	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient without derating	-25	-	+70	$^{\circ}\text{C}$
Storage Temperature Range	Ambient	-55	-	+125	$^{\circ}\text{C}$
Temperature Coefficient		-	0.02	-	$\%/^{\circ}\text{C}$
Cooling	Free Air Convection				

GENERAL

Parameter	Condition	Min.	Typ.	Max.	Units
Operating Frequency	Min V_{IN} to max V_{IN}	$\leq 900\text{V}$ output models	8	-	kHz
		$\geq 1\text{kV}$ output models	15	-	
Isolation Voltage	Input to output, model dependent	1500	-	3600	VDC
Insulation Resistance		100	-	-	$\text{M}\Omega$
Size (L x W x H)		2.25 x 1.125 x 0.5 (57.15 x 28.575 x 12.7)			inches (mm)
Weight		-	45	-	grams
Case	Glass Reinforced Polymer				
Potting	Vacuum Impregnated Epoxy				
Box Packaging (W x L x H)	8 x 7.5 x 1.5 (203.2 x 190.5 x 38.1) or 12 x 9 x 1.5 (304.8 x 228.6 x 38.1)				inches (mm)

DESIGNED TO MEET





Test	Referenced Standard	Description
Vibration	MIL-STD-202	Method 204, Vibration, High Frequency, Condition D
Shock	MIL-STD-202	Method 213, Shock (Specified Pulse), Condition I
Humidity	MIL-STD-202	Method 106, Moisture Resistance
Altitude	MIL-STD-202	Method 105, Barometric Pressure (Reduced), Condition D

SPECIFICATIONS (Max. V_{IN} , Full Load, $T_A = +25^{\circ}\text{C}$, 1 hour warm up unless otherwise specified)

OPTIONS AVAILABLE – CONTACT PICO FOR PART NUMBER


Parameter	Referenced Standard	Description
Stabilization Bake	MIL-STD-883	Referenced Method 1008 Non-operating maximum storage temperature for 24 hours
Temperature Cycle	MIL-STD-883	Referenced Method 1010 Non-operating at temperature extremes, 15 mins/temp, 10 cycles
Burn-In	MIL-STD-883	Referenced Method 1015 Max operating temperature for 160 hours
Expanded Ambient Operating Temperature		-55°C to +85°C

DATA CURVES (Max. V_{IN} , $T_A = +25^{\circ}\text{C}$, 1 hour warm up unless otherwise specified)

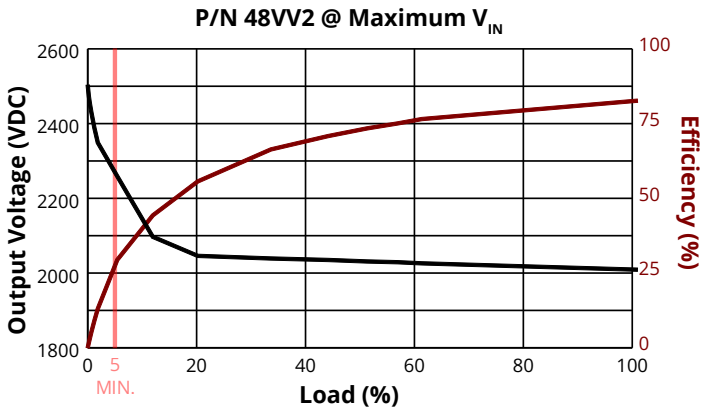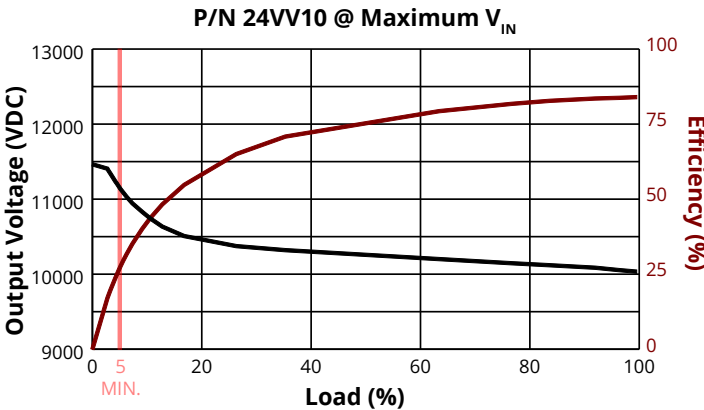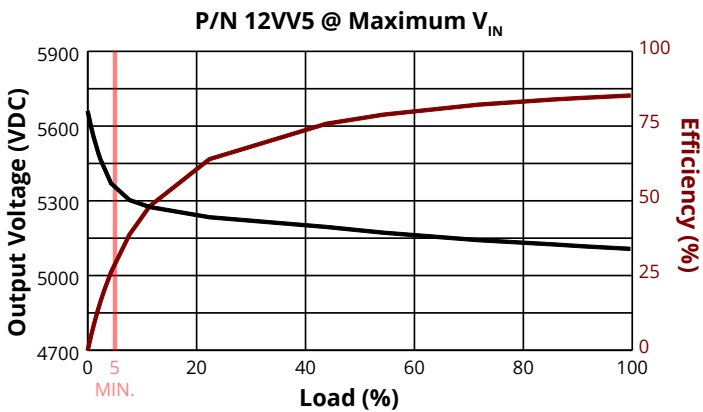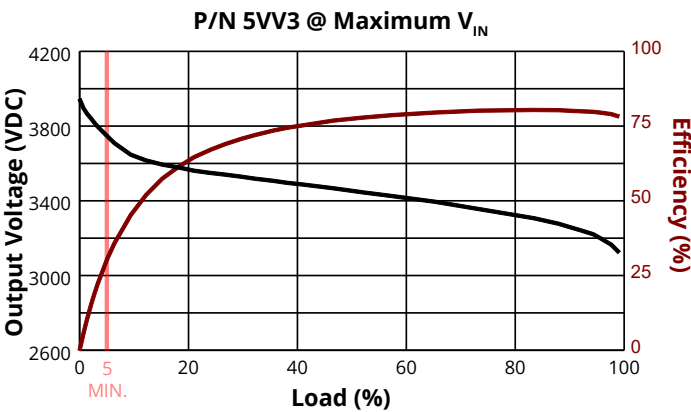


TYPICAL CONNECTION DIAGRAM


ISOLATED MODELS

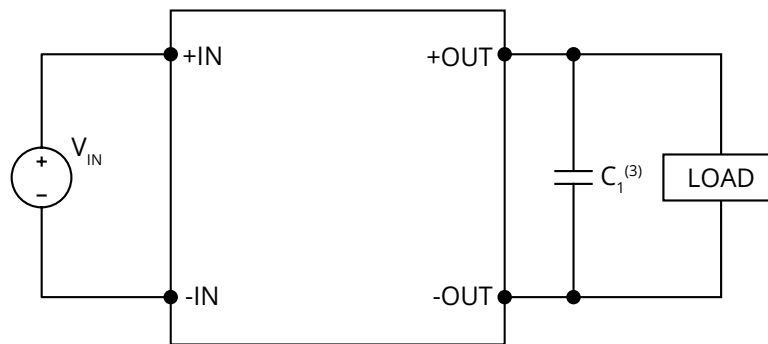

NON-ISOLATED POSITIVE MODELS

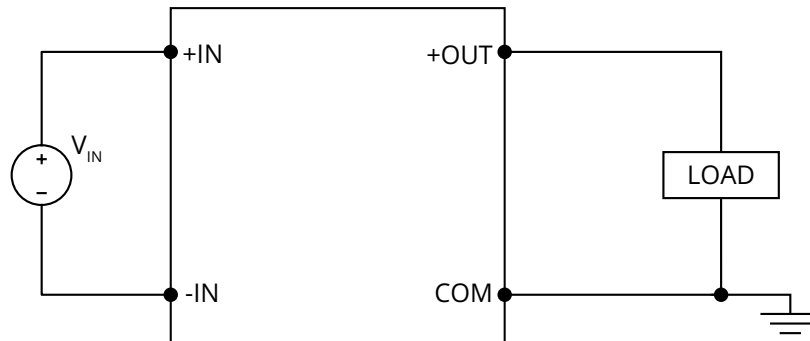

NON-ISOLATED NEGATIVE MODELS

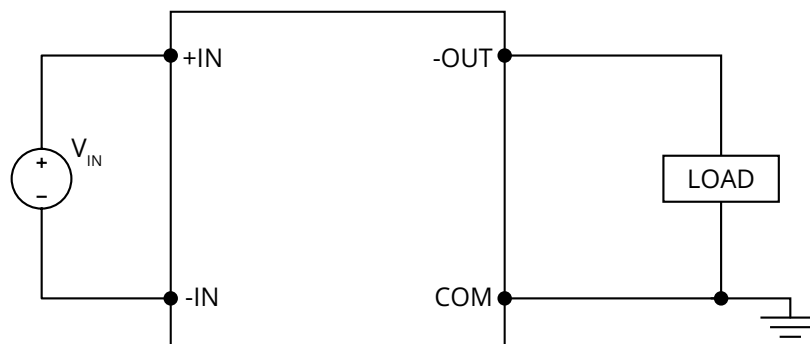

Note 3: For $\leq 900V$ output models, $0.1\mu F$, $2kV$ high quality ceramic capacitor is required across the output.


Note 5: For isolated models, input ground and output ground is not connected internally. Input ground and output ground can not be connected anywhere in the circuit.

Note 6: For non-isolated positive models, output COM terminal must be connected to input positive or input negative externally. Output will be positive voltage and non-isolated from input. Module is internally transformer isolated.

Note 7: For non-isolated negative models, output COM terminal must be connected to input positive or input negative externally. Output will be negative voltage and non-isolated from input. Module is internally transformer isolated.

MECHANICAL DRAWINGS


≤5000V OUTPUT MODELS

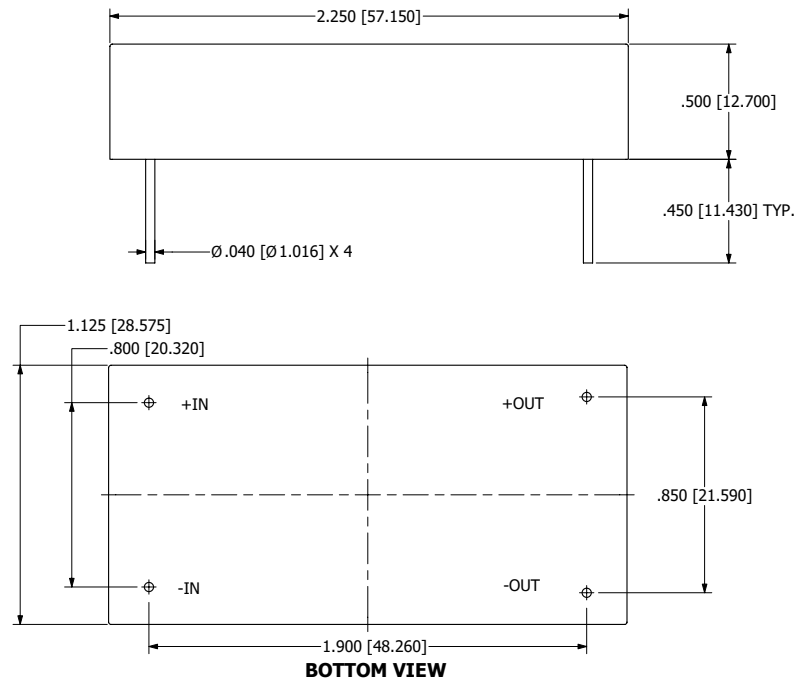

NOTES


- a. ALL DIMENSIONS ARE IN INCHES, [] = MM
- b. INPUT GROUND AND OUTPUT GROUND MAY BE CONNECTED.

≥6000V ISOLATED OUTPUT MODELS

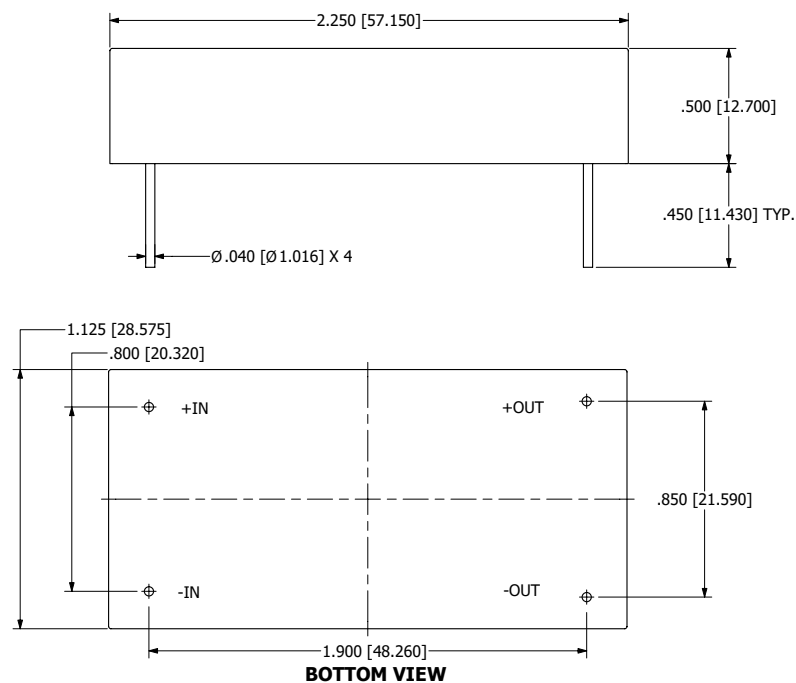


NOTES

- a. ALL DIMENSIONS ARE IN INCHES, [] = MM
- b. INPUT GROUND AND OUTPUT GROUND MUST NOT BE ANYWHERE IN THE CIRCUIT.
- c. FOR ≥6000V OUTPUT MODELS, OUTPUT IS FLOATING.



MECHANICAL DRAWINGS


≥6000V NON-ISOLATED POSITIVE OUTPUT MODELS

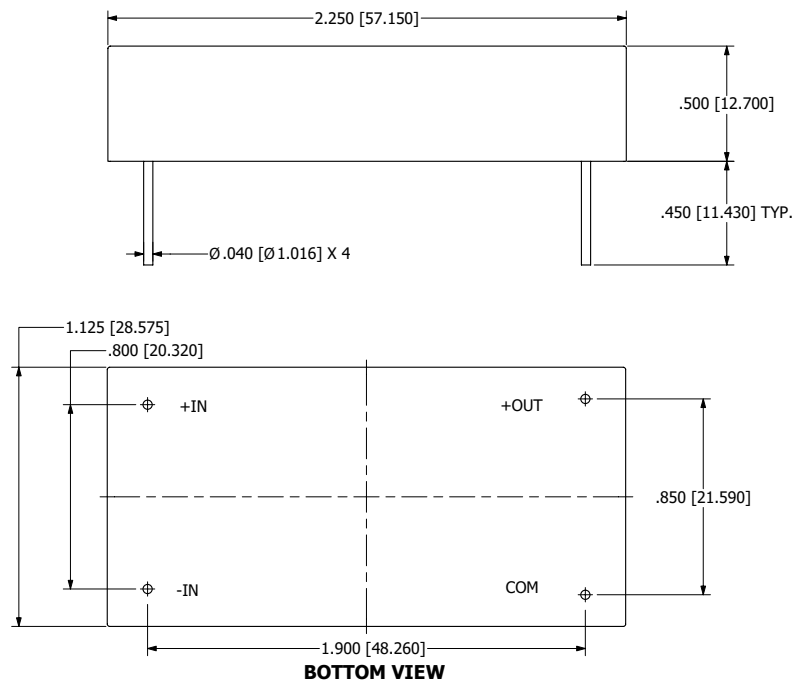

NOTES


- ALL DIMENSIONS ARE IN INCHES, [] = MM
- COMMON OUTPUT MUST BE CONNECTED TO +IN OR -IN INPUT.
- OUTPUT IS POSITIVE.




≥6000V NON-ISOLATED NEGATIVE OUTPUT MODELS

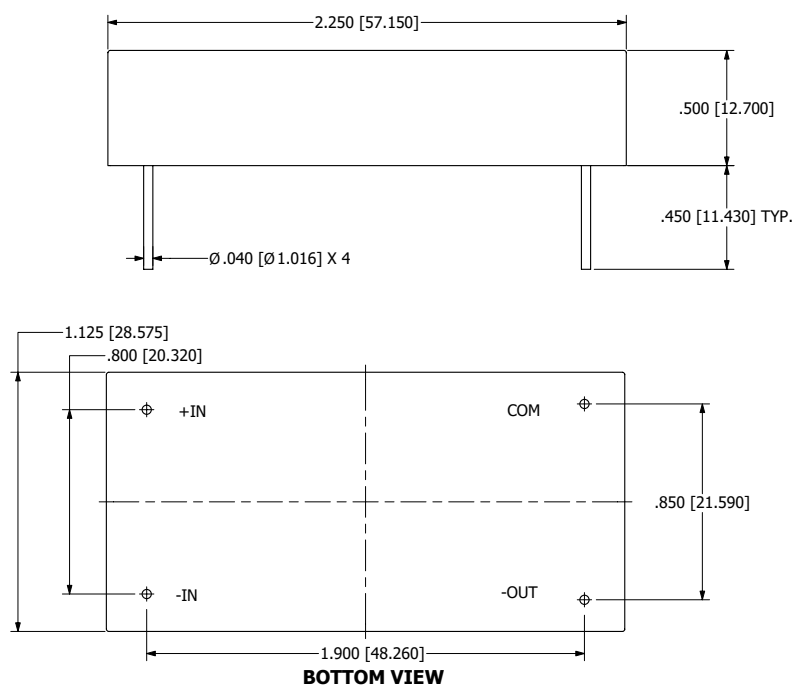

NOTES

- ALL DIMENSIONS ARE IN INCHES, [] = MM
- COMMON OUTPUT MUST BE CONNECTED TO +IN OR -IN INPUT.
- OUTPUT IS NEGATIVE.



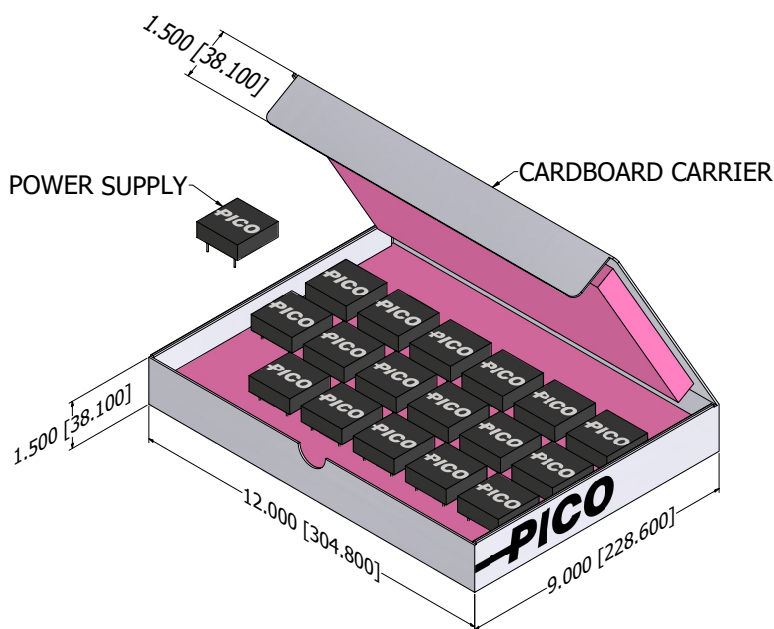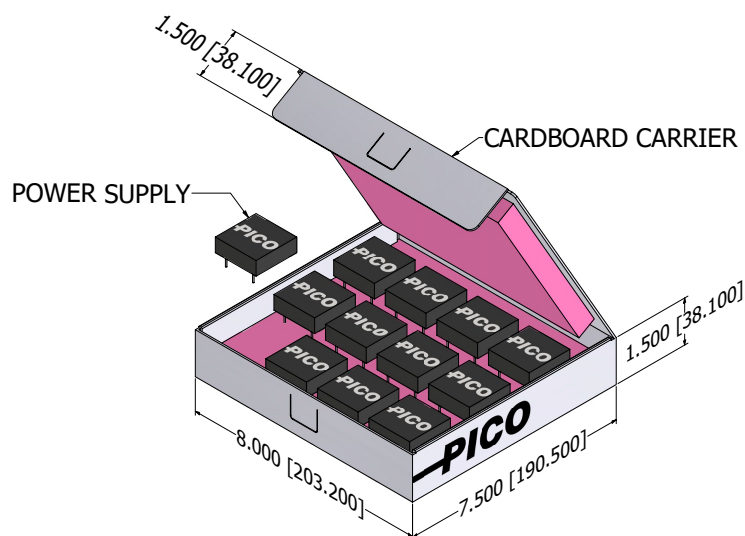

Pico warrants each product manufactured by us and sold by us or an authorized representative, to be free from defects in material and workmanship. If properly used, it will perform within its applicable specifications for a period of one year after original shipment. Pico's obligation under this guarantee is limited to repairing or replacing our product to the original purchaser. This warranty is in lieu of all other warranties, express or implied and constitutes fulfillment of our obligations to the purchaser. We do not guarantee that the products can be used for a particular purpose other than those solely covered by the product's specifications. Pico must be notified if the product must meet particular certifications and/or standards. We assume no liability, in any event, for consequential damages, for anticipated or lost profits, incidental damages or loss of time or other losses incurred by the purchaser or any third party in connection with products covered by this warranty or otherwise. The purchaser will indemnify and hold Pico harmless for any damages, losses, costs, etc. from usage not within the product's specifications. Pico must be consulted before usage of its products in a nuclear, radioactive or space environment.

We reserve the right to discontinue products without notice, We reserve the right to make modifications to any existing catalog products without notice, at any time, without the obligation to modify units previously sold.